


DATE 10/03/22 by: *Rafael A. Carbone*
Building Official
PERMIT NO. BLD2022-17276
ADDRESS 9344 N. NARCOOSSEE RD
CONTRACTOR SHREY PATEL
NOTE: Permit issuance does not grant permission
to violate applicable codes
Keep this plan on site at all times
CITY OF ORLANDO
PERMITTING SERVICES DIVISION



1 PLUMBING PLAN
1/4"=1'-0"

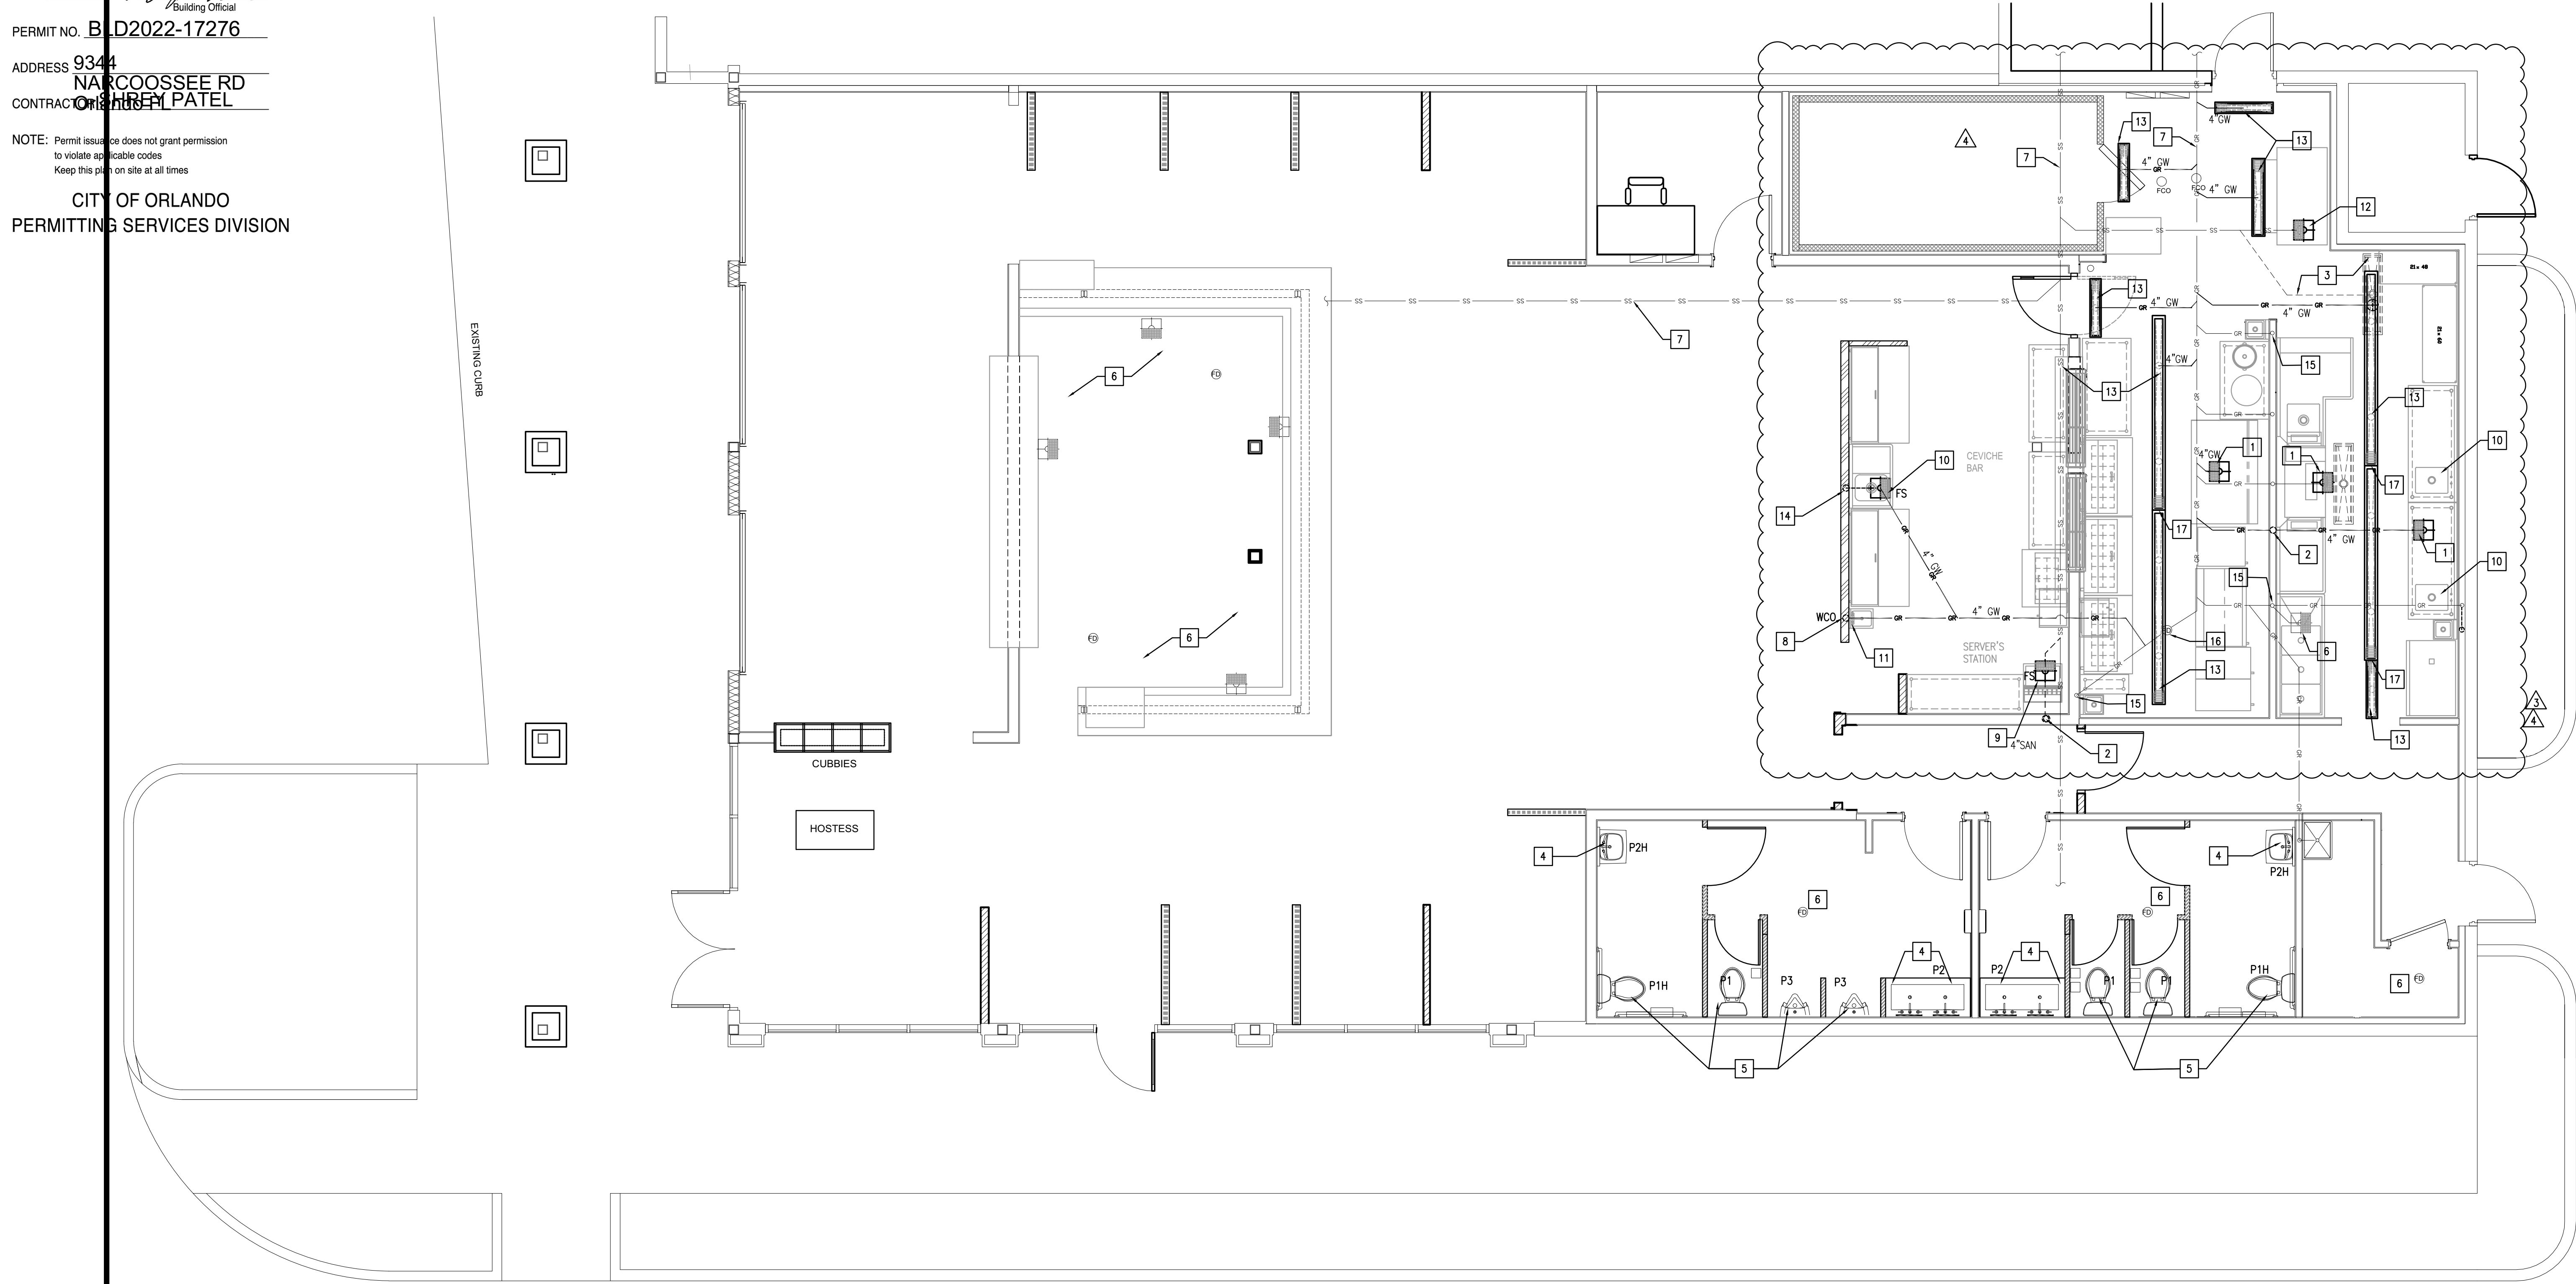

LEGEND:

- SS — SS — EXISTING SANITARY LINE
GR — GR — EXISTING GREASE LINE
GR — GR — NEW GREASE LINE
GR — GR — NEW SANITARY LINE

GENERAL NOTES

- EXISTING PLUMBING FIXTURES AND CONNECTIONS TO REMAIN IN THE KITCHEN, AND BAR AREAS.
- EXISTING GREASE TRAP SIZE: (3) THREE 1,250 GAL EACH = 3,750 GALLONS.

KEY NOTES

- INSTALL NEW FLOOR SINK (FS) AND CONNECT TO EXISTING GREASE LINE.
- INSTALL NEW VENT INSIDE THE NEAREST WALL AND CONNECT TO EXISTING VENTING SYSTEM.
- REMOVE EXISTING TRENCH DRAIN & INSTALL NEW TRENCH DRAIN, CONNECT TO EXISTING GREASE LINE, CAP-OFF OLD / EXISTING SANITARY LINE.
- INSTALL NEW LAVATORY AT SAME LOCATION OF PREVIOUS ONE.
- INSTALL NEW TOILET FIXTURE AT SAME LOCATION OF PREVIOUS ONE.
- EXISTING FLOOR DRAIN, FLOOR SINK TO REMAIN
- ASSUMED EXISTING UNDERGROUND SANITARY AND GREASE PLUMBING LINES. GC TO FIELD VERIFY LOCATION.
- PROVIDE & INSTALL A WALL CLEAN-OUT FOR THE FLOOR SINK LINE.
- INSTALL NEW FLOOR SINK (FS) AND CONNECT TO EXISTING SANITARY LINE.
- PREP SINK TO DISCHARGE THROUGH AN INDIRECT PIPE INTO THE NEW FLOOR SINK. PROVIDE AIR GAP. FLOOR SINK TO CONNECT TO THE GREASE TRAP LINE.
- HAND SINK TO DISCHARGE THROUGH A DIRECT CONNECTION TO THE GREASE TRAP LINE.
- REPLACE FLOOR DRAIN WITH NEW FLOOR SINK, CONNECT TO EXISTING SANITARY LINE.
- INSTALL NEW TRENCH DRAIN (TD) AND CONNECT TO EXISTING GREASE LINE.
- INSTALL NEW AIR ADMITTANCE VALVE (AAV) INSIDE THE LOW WALL.
- EXISTING VENT IN WALL. ASSUMED ACCORDING TO PREVIOUS TENANT DRAWINGS.
- REMOVE EXISTING FLOOR DRAIN, CAP-OFF LINE ACCORDING TO PLUMBING CODE.
- CONNECT TRENCH DRAIN IN SERIES.

ARCHITECT OF RECORD:
Rafael A. Carbone
Rafael A Carbone Architect
License # 94894
rcarchitecture2022@outlook.com
CONTACT: cell # 407.375.0209

SEAL:

Rafael A. Carbone

Digitally signed by Rafael A. Carbone
Date: 2022.09.20 21:51:38 -04'00'

PROJECT:
PISCO
PERUVIAN GASTROBAR
9344 N. NARCOOSSEE RD
ORLANDO, FLORIDA 32827

REVISIONS:	
REV	DATE
1	07-28-22
2	08-10-22
3	08-26-22
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	

PROJECT NO: 2022.001
ISSUE DATE: 06/27/2022
drawn by: RC checked by: RC

SHEET TITLE:
PLUMBING PLAN
UNDERGROUND

P1.0
SHEET no.