


DATE 08/19/22
PERMIT NO. BLD2022-17276
ADDRESS 9344 NARCOOSSEE RD
CONTRACTOR CHITRA PATEL
NOTE: Permit issuance does not grant permission to violate applicable codes
Keep this plan on site at all times
CITY OF ORLANDO
PERMITTING SERVICES DIVISION

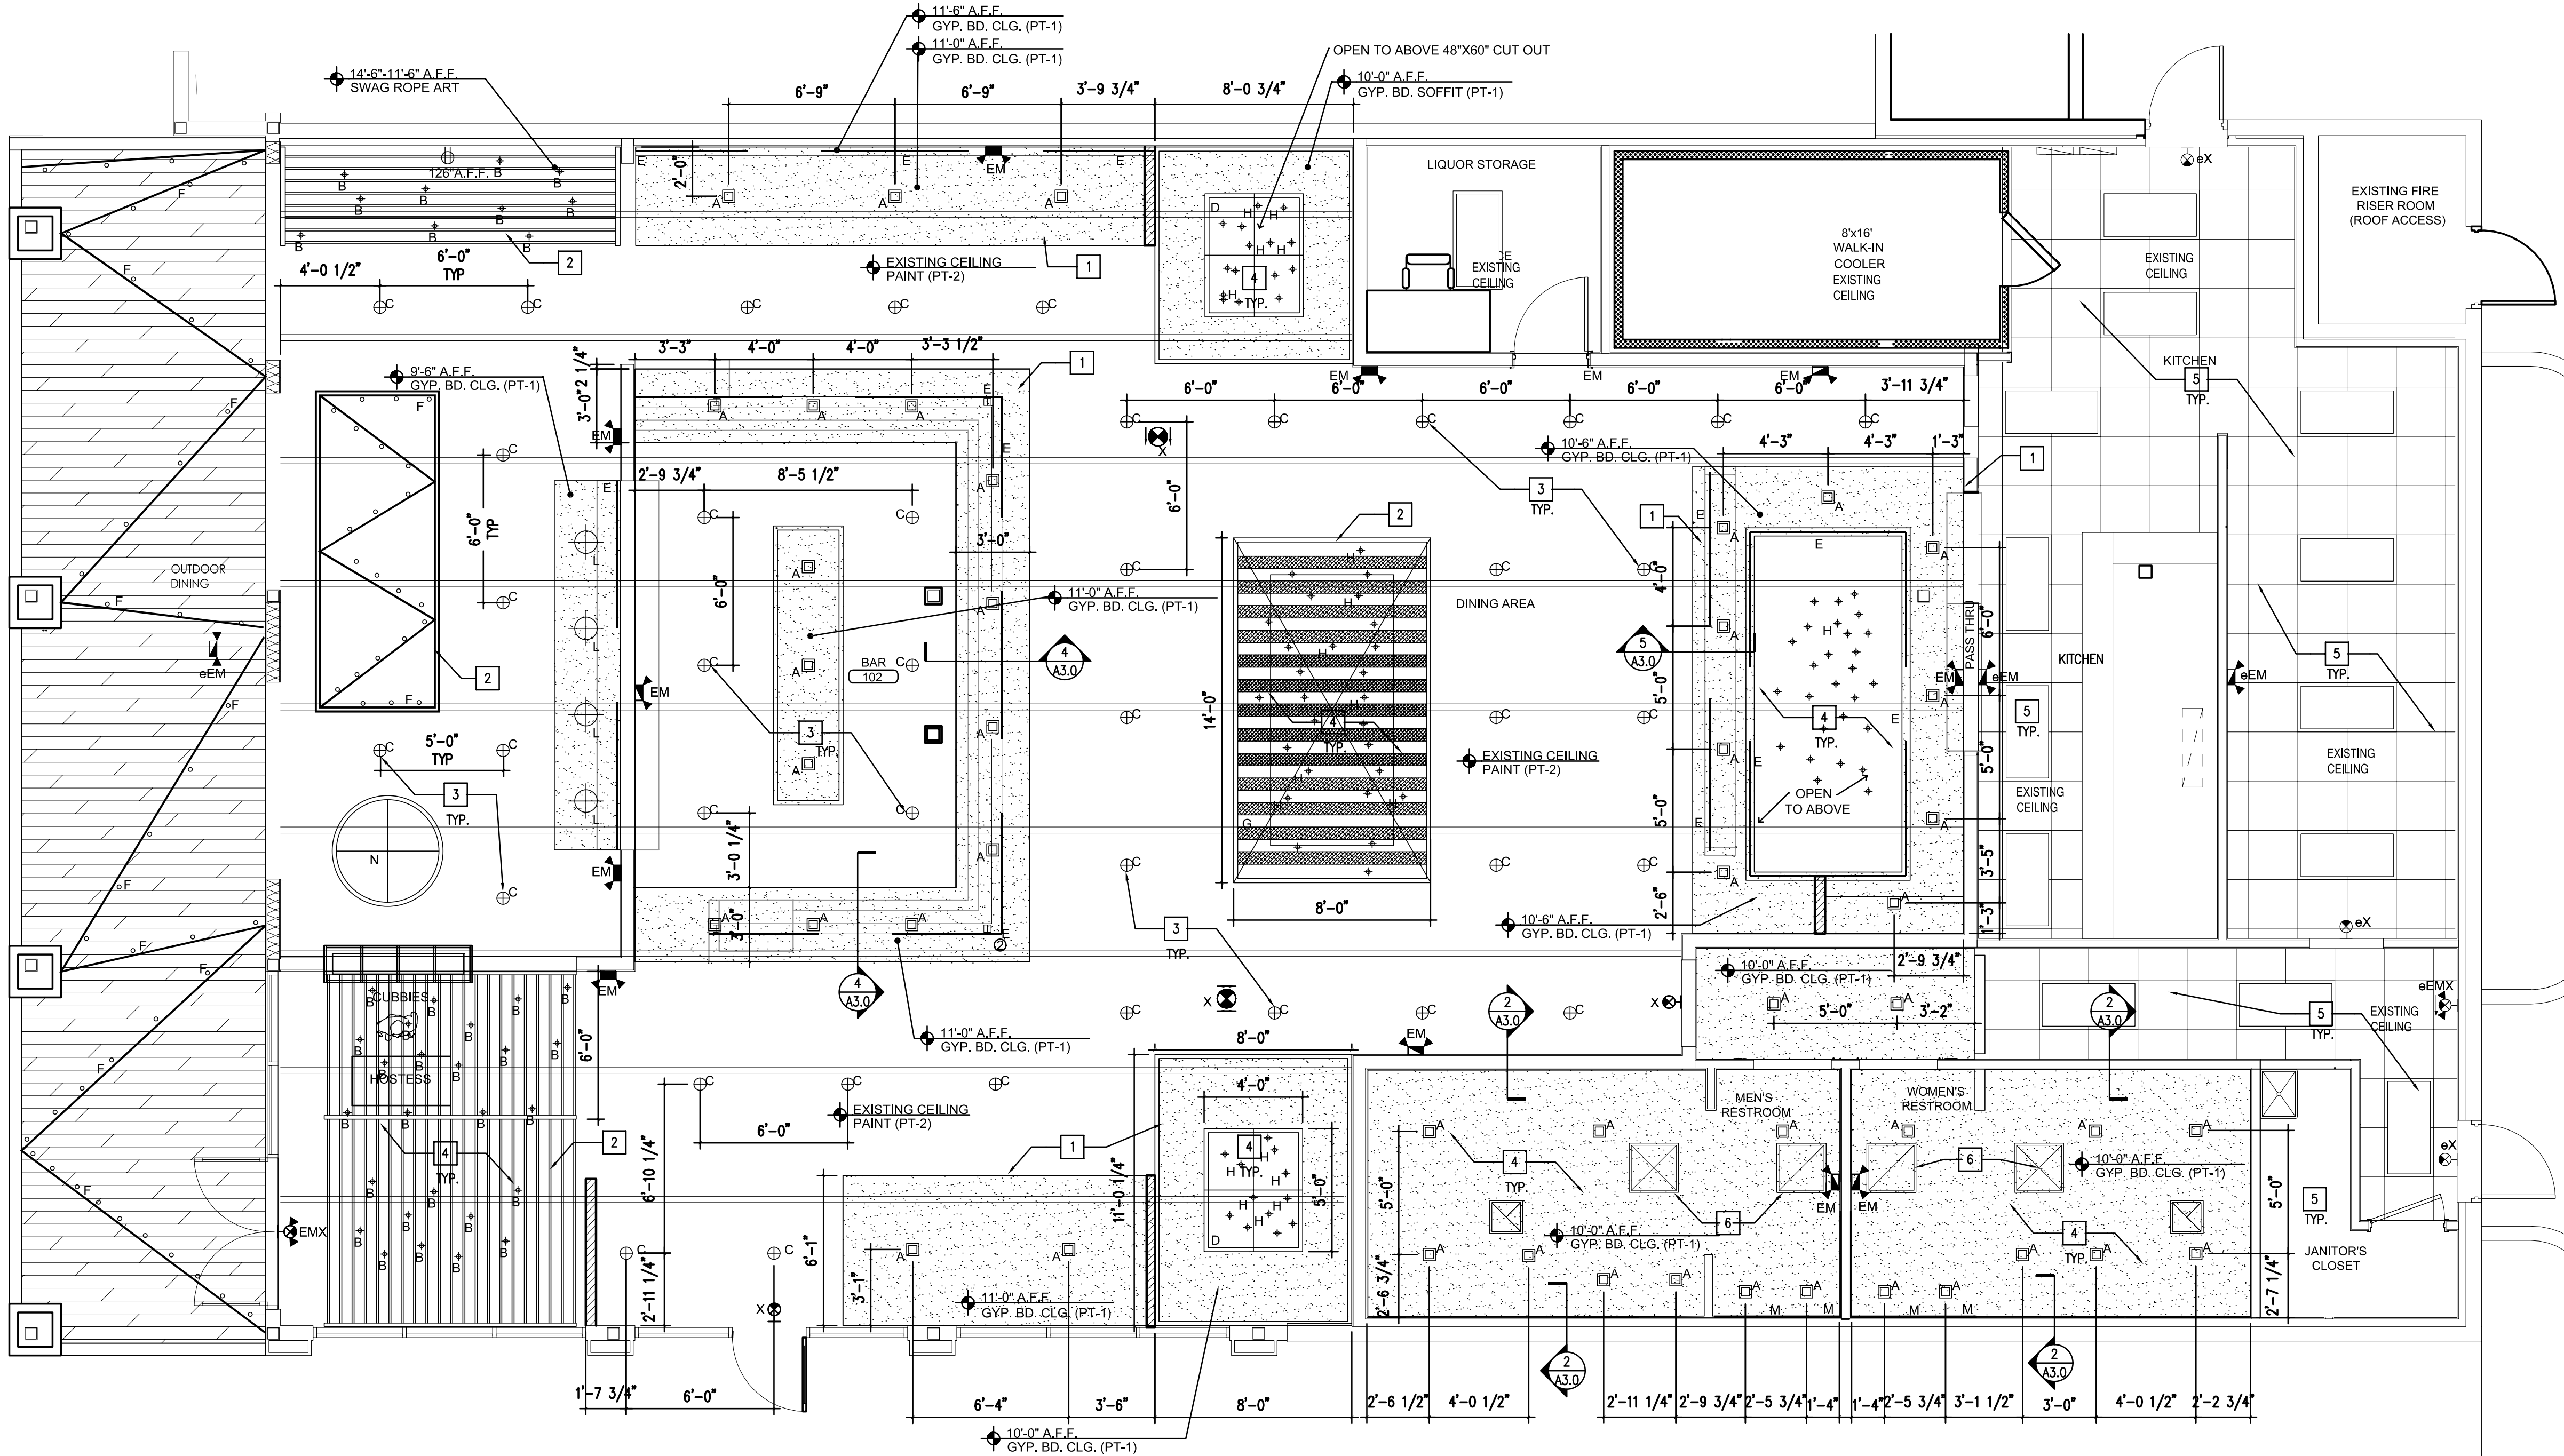

1 REFLECTED CEILING PLAN
1/4"=1'-0"

GENERAL NOTES:

- ALL POWER TO LIGHTS SHALL BE CONNECTED TO PANEL "LV".
- REUSE EXISTING LIGHTING CONTACTORS FROM REPLACED FIXTURES OR RE-USED CIRCUITS.
- FIRE SPRINKLER SYSTEM NOTE: EXISTING FIRE SPRINKLER HEADS TO BE RELOCATED OR EXTENDED BY THE FIRE SUBCONTRACTOR AFTER THE INSTALLATION OF THE NEW SOFFITS AND CEILING FEATURES

MECHANICAL NOTES:

- ALL EXISTING DUCTWORK, DIFFUSERS AND RETURN GRILLES ARE EXISTING TO REMAIN (ETR). CLEAN AND PREPARE FOR NEW PAINT FINISH.
- RELOCATE A LIGHT FIXTURE IF IT IS IN CONFLICT WITH AN EXISTING DUCTWORK. NOTIFY THE ARCHITECT.

KEY NOTES

- NEW DROPPED SOFFIT ATTACHED TO ADJACENT WALLS, AND SUSPENDED FROM STRUCTURE ABOVE. SEE REFERENCED DETAIL. SEE INTERIOR DESIGN DRAWINGS FOR DETAILS & FINISHES.
- NEW CEILING FEATURE SUSPENDED FROM STRUCTURE ABOVE WITH ALL-THREADED RODS AND UNISTRUTS FASTENED TO ROOF BAR JOISTS. SEE INTERIOR DESIGN DRAWINGS FOR FINISHES. REFER TO DETAILS 4, 5 & 6 ON A3.0.
- NEW LIGHT FIXTURE TO REPLACE EXISTING PENDANTS IN THE DINING ROOMS. RELOCATE J-BOXES AS REQUIRED TO THE LOCATION SHOWN IN THE REFLECTED CEILING PLAN IN THE INTERIOR DESIGN DRAWINGS.
- NEW LIGHT FIXTURE TO REUSE EXISTING POWER SOURCE FROM EXISTING REMOVED LIGHT FIXTURE IN THE AREA. REFER TO REFLECTED CEILING PLAN IN THE INTERIOR DESIGN DRAWINGS.
- EXISTING LIGHT FIXTURES IN THIS AREA TO REMAIN. REPLACE LAMPS AND CLEAN LENSES.
- EXISTING DIFFUSERS AND RETURN GRILLES TO BE RELOCATED UP AFTER THE CONSTRUCTION OF THE NEW RAISED CEILING.

CEILING LEGEND

	ACT METAL SUSPENSION SYSTEM
	2'x4' DROP-IN PRISMATIC FIXTURE
	LED CYLINDER PENDANT FIXTURES (SEE INTERIOR DESIGN DWGS & ELECTRICAL)
	LED RECESSED FIXTURE (SEE INTERIOR DESIGN DWGS & ELECTRICAL)
	PENDANT FIXTURES (SEE INTERIOR DESIGN DWGS & ELECTRICAL)
	LED TAPE LIGHT
	EXIT SIGNS, EXISTING FIXTURE INDICATED w/ LOWER CASE e
	EMERGENCY LIGHT FIXTURE EXISTING FIXTURE INDICATED w/ LOWER CASE e
	EXHAUST FAN
	SUPPLY DIFFUSER
	RETURN DIFFUSER

ARCHITECT of record:
Rafael A. Carbone
License # 94894
rarchitecture2022@outlook.com
CONTACT: cell # 407.375.0209



Rafael A. Carbone
Digitally signed by Rafael A. Carbone
Date: 2022.07.27 22:41:51 -0400

PROJECT:
PISCO
PERUVIAN GASTROBAR
9344 N. NARCOOSSEE RD
ORLANDO, FLORIDA 32827

REVISIONS:
DATE 07-25-22
REV 1
REMARKS
BLDG DEPT COMMENTS

SHEET TITLE:
REFLECTED
CEILING PLAN
A1.1
SHEET no.