


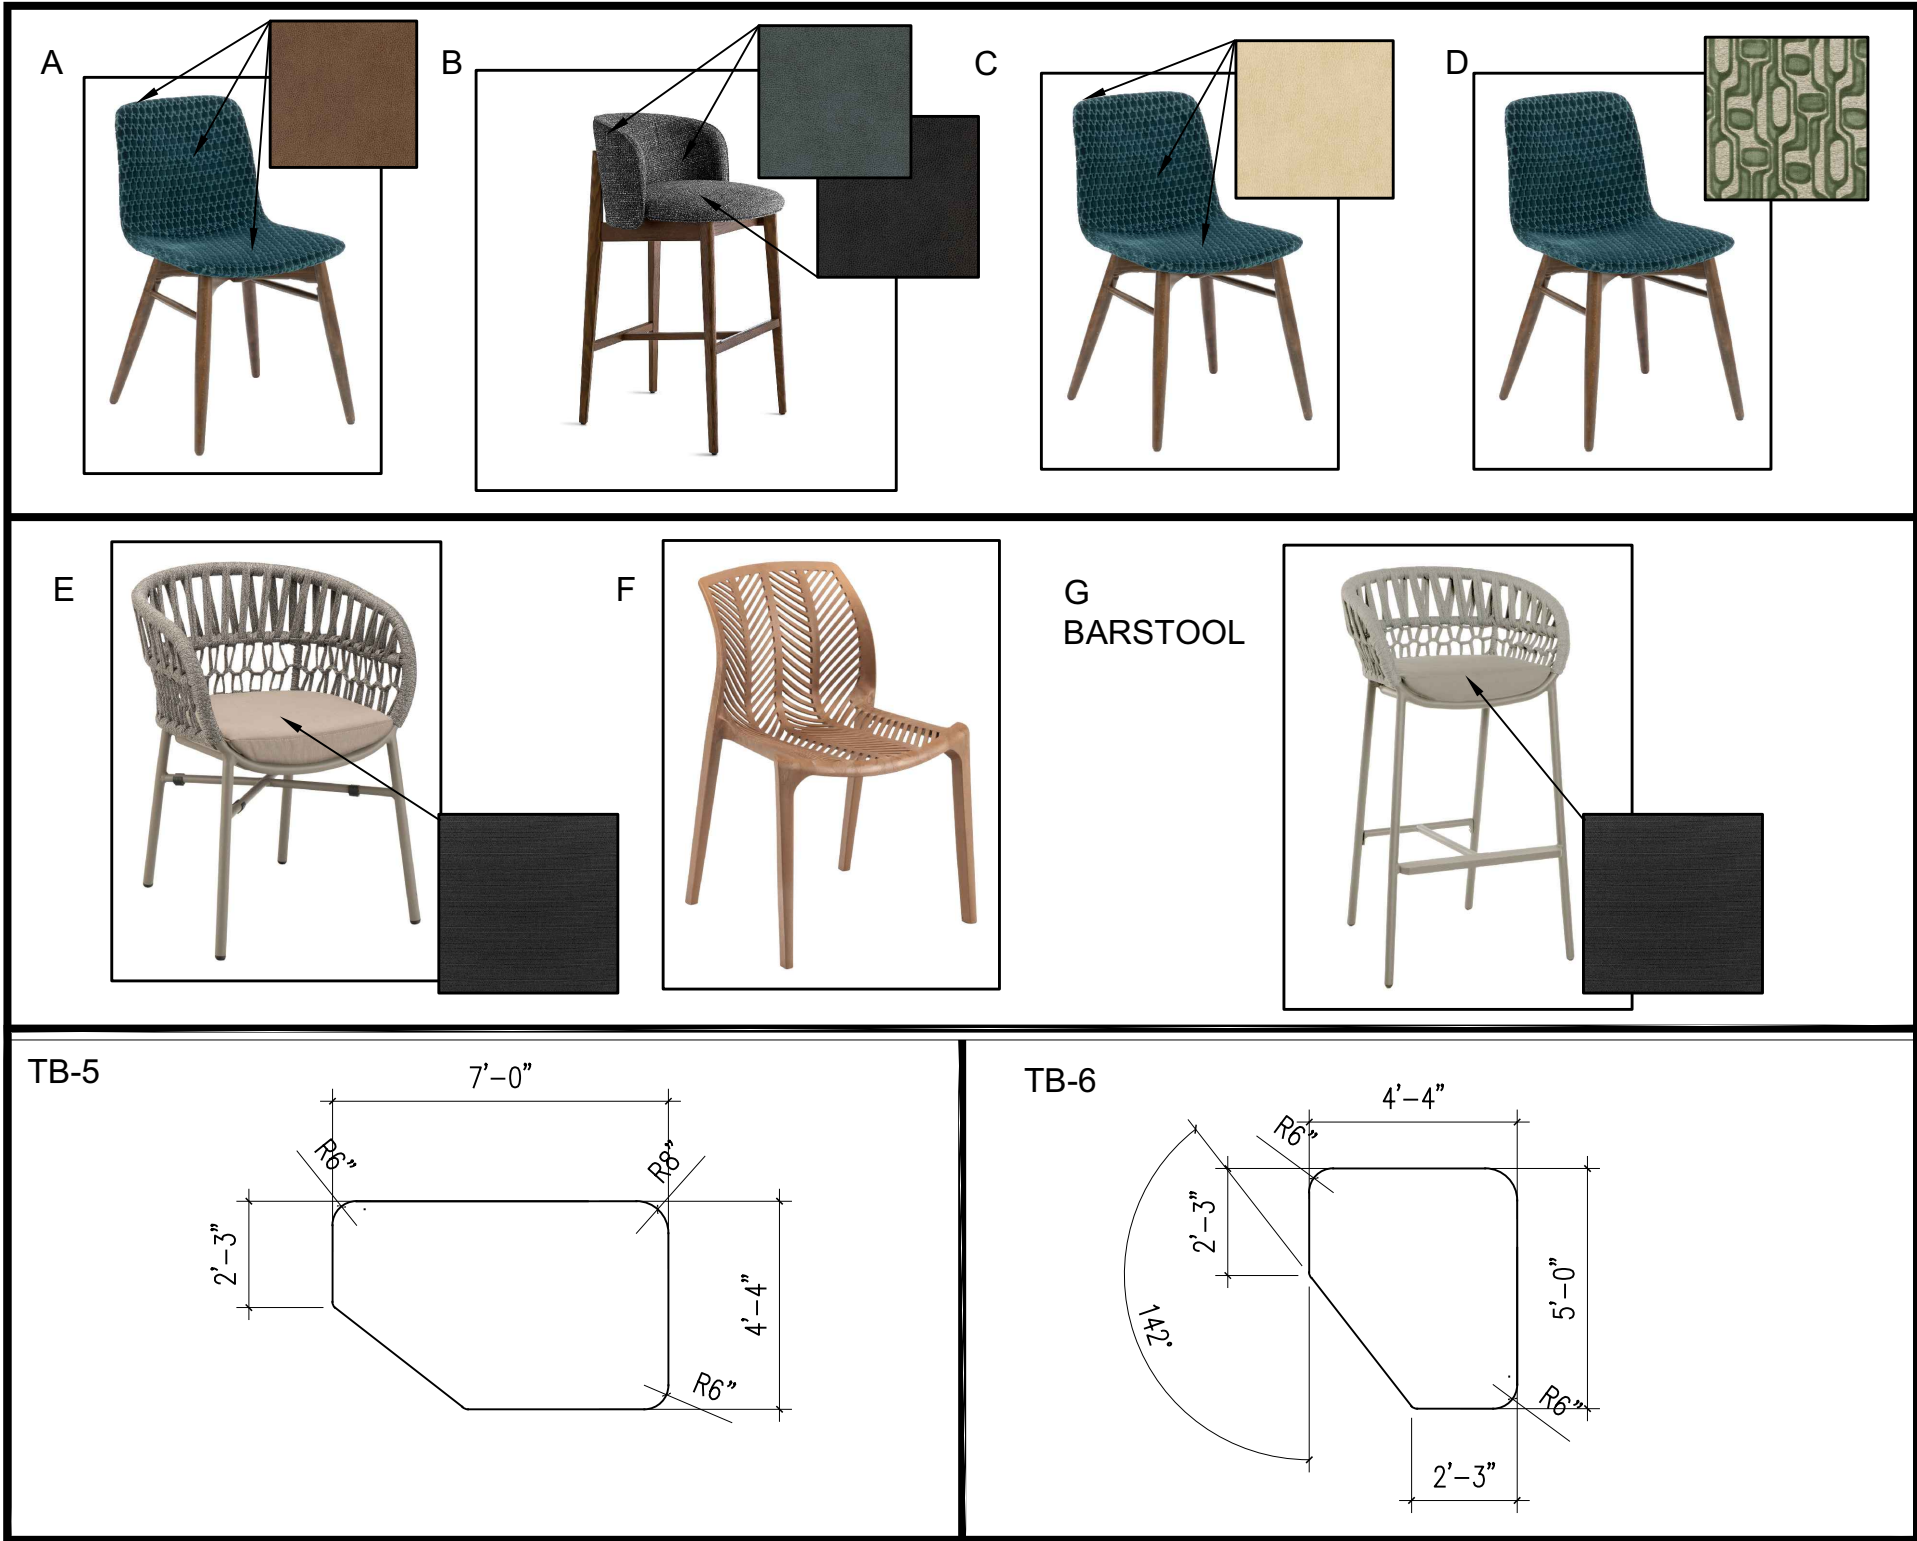
DATE 08/19/22 by:  Building Official  
PERMIT NO. **BLD2022-17276**  
ADDRESS **9344 NARCOOSSEE RD**  
CONTRACTOR **SHREY PATEL**

NOTE: Permit issuance does not grant permission to violate applicable codes  
Keep this plan on site at all times


**CITY OF ORLANDO**  
**PERMITTING SERVICES DIVISION**



FURNITURE SCHEDULE				
TAG	TYPE	MANUFACTURER	DESCRIPTION	QUANTITY
A	DINING CHAIR	FLORIDA SEATING	CN EMMA S FABRIC: WHOLE CHAIR - ARCHITEX: RYDER - MONMOUTH ( FB-7)	QTY. 8
B	BARSTOOL	JL CONRAD	CUSTOM MADE BARSTOOL-SEE PHOTO BELOW BAR SEAT HEIGHT FABRIC:SEAT ARCHITEX: RYDER - BARRISTER (FB-2) FABRIC:BACK ARCHITEX: RYDER - GULFSTREAM (FB-3)	QTY. 28
C	DINING CHAIR	FLORIDA SEATING	CN EMMA S FABRIC: WHOLE CHAIR - ARCHITEX: RYDER - ARLINGTON (FB-1)	QTY. 8
D	DINING CHAIR	FLORIDA SEATING	CN EMMA S FABRIC: WHOLE CHAIR ARCHITEX: GIA - VERDE	QTY. 12
E	OUTDOOR DINING CHAIR	FLORIDA SEATING	LAGUNA CHAIR TAUPE. SEAT CUSHION: SUNBRELLA CANVAS RAVEN BLACK 5471-0000	QTY. 54
F	DINING CHAIR	FLORIDA SEATING	SPG S	QTY. 12
G	OUTDOOR BARSTOOL	FLORIDA SEATING	LAGUNA BARSTOOL - TAUPE. SEAT CUSHION: SUNBRELLA CANVAS RAVEN BLACK 5471-0000	QTY. 19
B1	BOOTH	BY LOCAL MILLWORKER	SEAT: (FB-3 )- ARCHITEX: RYDER - GULSTREAM BACK: (FB-4 )- ARCHITEX: GIA - GRIGIO	
B2	BOOTH	BY LOCAL MILLWORKER	SEAT: (FB-3 )- ARCHITEX: RYDER - GULSTREAM BACK: (FB-4 )- ARCHITEX: GIA - GRIGIO	
B3	BOOTH	BY LOCAL MILLWORKER	SEAT: ARCHITEX: (FB-2) RYDER - BARRISTER BACK: ARCHITEX: (FB-6) THEATRE DISTRICT - MACAROON	
B4	BOOTH	BY LOCAL MILLWORKER	SEAT: ARCHITEX: RYDER - BARRISTER (FB-6) BACK: ARCHITEX: THEATRE DISTRICT - MACAROON	
B5	BOOTH	BY LOCAL MILLWORKER	SEAT: ARCHITEX: RYDER - BARRISTER (FB-6) BACK: MIX OF 4 FABRICS. SEE ELEVATIONS. (FB-1, FB-2, FB-3 & FB-5)	
TB-1	DINING TABLE	BY LOCAL MILLWORKER	24" X 32" X 30" H WOOD TABLE TOP WALNUT. 1-1/2" SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 6
TB-2	DINING TABLE	BY LOCAL MILLWORKER	36" X 36" X 30" H WOOD TABLE TOP MIX OF WALNUT AND WHITE OAK. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 2
TB-3	DINING TABLE	BY LOCAL MILLWORKER	48" L X 32" W X 30" H WOOD TABLE TOP WHITE OAK. 1-1/2" SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 3
TB-4	DINING TABLE- BOOTH	BY LOCAL MILLWORKER	72" L X 32" W X 30" H WOOD TABLE TOP WHITE OAK. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 2
TB-5	DINING TABLE	BY LOCAL MILLWORKER	CUSTOM SHAPE - SEE BELOW DRAWING. 30" H WOOD TABLE TOP WALNUT 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 1
TB-6	DINING TABLE	BY LOCAL MILLWORKER	CUSTOM SHAPE - SEE BELOW DRAWING. X 30" H WOOD WALNUT. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 1
TB-7	DINING TABLE	BY LOCAL MILLWORKER	54" DIAM. X 30" H WOOD TABLE TOP WHITE OAK. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 1
TB-8	DINING TABLE	BY LOCAL MILLWORKER	36" W X 72" L X 30" H WOOD TABLE TOP WALNUT AND WHITE OAK MIXTURE. 1-1/2" SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 2
TB-9	DINING TABLE	BY LOCAL MILLWORKER	48" L X 32" W X 30" H WOOD TABLE TOP WALNUT. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 4
TB-10	DINING TABLE	BY LOCAL MILLWORKER	36" X 36" X 42" H WOOD BAR TABLE TOP - WALNUT. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 40" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 2
TB-11	DINING TABLE	BY LOCAL MILLWORKER	30" W X 36" L X 30" H WOOD TABLE TOP MIX OF WALNUT AND WHITE OAK. 1-1/2" THICK SQUARE EDGE. CROSS TABLE BASES 3" COLUMN, 7-5/8" TOP PLATE, 28" HEIGHT METAL TABLE BASE IN GOLD/BLACK POWDER COAT.	QTY. 1
TB-12	DINING TABLE	OUTDOOR FLORIDA SEATING	30" X 30" X 30" H STYLE: DARK CONCRETE. BASE: AL-2600 Bronze	QTY. 5
TB-13	DINING TABLE	OUTDOOR FLORIDA SEATING	36" W X 36" L X 30" H STYLE: STYLE: ELEMENT- DARK CONCRETE BASE: AL-2600 Bronze	QTY. 6



FINISH SCHEDULE				
TAG	DESCRIPTION	SPECIFICATIONS	COST	CONTACT
(CNT-1)	QUARTZ COUNTERTOP	COSENTINO- SILESTONE- N-BEOST ETERNAL SERENA. SLAB CHECK REQUIRED. 2CM	\$PYD.	COSENTINO IGNACIO PANIAGUA 786.635.9603
(CN-1)	CONCRETE CLADDING	CONCRETE CLADDING	\$PYD.	--
(FB-1)	FABRIC	ARCHITEX: RYDER - ARLINGTON FIRE CODES: CAL TB 117-2013, NFPA 260UFAC CLASS 1, ASTM E84 (ADHERED), IMO, DURABLE: EXCEEDS 300,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN tel:321.693.7099
(FB-2)	FABRIC	ARCHITEX: RYDER - BARRISTER FIRE CODES: CAL TB 117-2013, UFAC CLASS 1, ASTM E84 (ADHERED), FMVSS 302, IMO A.653 916/8.2, EXCEEDS 300,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN tel:321.693.7099
(FB-3)	FABRIC	ARCHITEX: RYDER - GULSTREAM FIRE CODES: CAL TB 117UFAC CLASS 1, ASTM E84 (ADHERED), IMO PART 8.2, DURABLE: EXCEEDS 300,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN tel:321.693.7099
(FB-4)	FABRIC	ARCHITEX: GIA - GRIGIO FIRE CODES: CAL TB 117-2013, NFPA 260UFAC CLASS 1 DURABLE: EXCEEDS 100,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN tel:321.693.7099
(FB-5)	FABRIC	KNOLL TEXTILES: KABUKI - K2084/ 4, COLOR - YAMA FLAME RESISTANCE: NFPA 260 (UFAC CLASS 1 ) ABRASION: 70,000 + DOUBLE RUBS	\$PYD.	KNOLL TEXTILES
(FB-6)	FABRIC	ARCHITEX: THEATRE DISTRICT - MACAROON FIRE CODES: NFPA 701 FR TEST, CAL TB 117, UFAC CLASS 1, NFPA 260, ASTM E84 (UNADHERED) DURABLE: EXCEEDS 200,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN TEL:321.693.7099
(FB-7)	FABRIC	ARCHITEX: RYDER - MONMOUTH FIRE CODES: CAL TB 117UFAC CLASS 1, ASTM E84 (ADHERED), IMO PART 8.2, DURABLE: EXCEEDS 300,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN TEL:321.693.7099
(FB-8)	FABRIC	ARCHITEX: GIA - VERDE FIRE CODES: CAL TB 117-2013, NFPA 260UFAC CLASS 1 DURABLE: EXCEEDS 100,000 DOUBLE RUBS	\$PYD.	ARCHITEX FABRICS CHUCK HOFFMAN tel:321.693.7099
(ETL-1)	EXTERIOR WALL TILE	DALTILE: DAL TILE-PIETRA DIVINA-NERO MARQUINA BLACK BLEND DA59. GROUT: GOLD TID0 - NEED TO SEE SAMPLES GROUT: GOLD SPARKLE.NEED SAMPLES TO REVIEW	\$XXSQ.FT.	DALTILE BRENDEN PAYNE 407.292.2691
(EFB-1)	EXTERIOR AWNING FABRIC	GLEN RAVEN-FIRESIST: BLACK 82008-0000 , California State Fire Marshal Title 19 NFPA 701-99, test method II, CPAI-84; Tent walls and roof FMVSS 302, FAA 25.853 (Aviation). UFAC Upholstered Furniture, Class 1	\$XXSQ.FT.	GLEN RAVEN FIRESIST
(TL-1)	FLOOR TILE	SPECIALTY TILE: GAUDI LUX HEX BLACK 8-5/ 8" X 9-7/ 8" #STPCD10GLBX 25/ CA. GROUT: BLACK	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TL-2)	WALL TILE	TRINITY TILE: OPULENCE I+82 GROUT: MAPEI 700 TRANSLUCENT	\$XXSQ.FT.	TRINITY TILE SARAH WORRELL 239-371-1433
(TL-4)	WALL TILE	SPECIALTY TILE: MURETTO TOSATO GLOSSY 2" X10" #STFNA10MTOS RUN TILE STACKED VERTICAL GROUT: MAPEI 700 TRANSLUCENT	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TL-5)	WALL TILE	SPECIALTY TILE: MURETTO ARGENTO GLOSSY 2" X10" #STWNA10MARG RUN TILE STACKED VERTICAL. ACCENT STRIP 2 ROWS GROUT: MAPEI 700 TRANSLUCENT	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TL-6)	WALL TILE	SPECIALTY TILE: MURETTO ORO GLOSSY 2" X10" #STWNA10MORO RUN TILE STACKED VERTICAL. ACCENT STRIP 2 ROWS GROUT: MAPEI 700 TRANSLUCENT	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TL-7)	WALL TILE	SPECIALTY TILE: INAX YAKOMONO-IZUMO - BLACK, ITEM#: IZM -310/3 GROUT: BLACK	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TL-8)	FLOOR TILE RESTROOM	DALTILE - FORMULA - UNION BLACK FM99 24"x48" - 1/16" GROUT OR TIGHTEST GROUT BLACK	\$XXSQ.FT.	DALTILE BRENDEN PAYNE 407.292.2691
(TL-9)	WALL TILE	SPECIALTY TILE: EXPRESSIONS SCALLOP BLACK 11- 1/4" X 12" #STFASESCKB. GROUT: STARLIKE EVO - SHINING GOLD	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TL-10)	WALL TILE	SPECIALTY TILE: SANTORINI LOFTI NERO 4" X 11-7/ 8" #STWAESLN GROUT: BLACK	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(TS-1)	FLOOR TRANSITION STRIP	SCHLUTER SYSTEMS: SCHLUTER®-RENO-V - SATIN BRASS. VERIFY HEIGHT/LENGTH OF CONCRETE TO TILE. VERIFY HEIGHT WITH FLOORING CONTRACTOR	\$XXSQ.FT.	SCHLUTER SYSTEMS
(TS-2)	FLOOR TRANSITION STRIP	SCHLUTER SYSTEMS: DILEX-AHK - AHK 1S 100 AMGB. BRUSHED BRASS. FOR HEIGHT, VERIFY WITH FLOORING CONTRACTOR	\$XXSQ.FT.	SCHLUTER SYSTEMS
(PT-1)	PAINT	BENJAMIN MOORE: OC-17 WHITE DOVE FLAT FINISH	\$--	--
(PT-2)	PAINT	BENJAMIN MOORE: 857 SHEEPS WOOL EGGSHELL FINISH	\$--	--
(PT-3)	PAINT	BENJAMIN MOORE: HC-172 REVERE PEWTER EGGSHELL FINISH	\$--	--
(PT-4)	PAINT	EXTERIOR PAINT TO MATCH PISCO LOGO GOLD COLOR	\$--	--
(WD-1)	WOOD TABLETOPS	WALNUT TRADITIONAL MILLWORKER OR TABLE COMPANY TO MATCH DESIGNER CONTROL SAMPLE. SUBMIT SAMPLES TO DESIGNER TO APPROVE. CLEAR MATTE SEALER	\$--	--
(WD-2)	WOOD TABLETOPS	WHITE OAK TRAD. OR HICKORY MILLWORKER OR TABLE COMPANY TO MATCH DESIGNER CONTROL SAMPLE. SUBMIT SAMPLES TO DESIGNER TO APPROVE. CLEAR MATTE SEALER.	\$--	--
(WD-3)	WOOD TABLETOPS BLEND	BLEND OF WALNUT TRADITIONAL AND WHITE OAK OR HICKORY. PLANKS 4" W	\$--	--
(WD-4)	NICHIHA PANELING	NICHIHA: VINTAGEWOOD - CEDAR	\$--	NICHIHA
(WV-1)	WOOD VENEER	WOOD VENEER TO MATCH WD-1 WALNUT STAIN	\$--	--
(WC-1)	WALLCOVERING	MDC INTERIOR SOLUTIONS: MHC 1319/ 4145 LAGUNA TREASURE FIRE RATED: CLASS A. FLAME SPREAD: 25 SMOKE DEVELOPED: 80	\$--	MDC INTERIOR SOL. ANN RANK 407.491.1752
(WC-2)	WALLCOVERING	MDC INTERIOR SOLUTIONS: MHC 1608/ 4145 TAMA PATINA FIRE RATED: CLASS A. FLAME SPREAD: 25 SMOKE DEVELOPED: 80	\$--	MDC INTERIOR SOL. ANN RANK 407.491.1752
(B-1)	WALL BASE	4" SQUARE EDGE WOOD BASE TO MATCH WD-1	\$--	--
(QT-1)	QUARRY TILE	SPECIALTY TILE: AMERICAN OLEAN QUARRY TILE GREY FLASH 8"X8"	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(QTB-1)	QUARRY TILE BASE	SPECIALTY TILE: AMERICAN OLEAN QUARRY TILE COVE GREY FLASH 8"X8"	\$XXSQ.FT.	YANERIS SANTIAGO SPECIALTY TILE 407-989-5473
(MTL-1)	POWDER COATING	PRISMATIC POWDERS: SPUN GOLD PPB 5921/ TOPCOAT OVER ALUMINUM. COLOR VARIES WITH THICKNESS	\$--	PRISMATIC POWDERS 866.774.7628
(PC-1)	POLISHED CONCRETE	GRIND AND POLISH EXISTING CONCRETE. 400 GRIT. DO A TEST AREA FOR DESIGNER AND OWNER TO APPROVE IN THE OFFICE.	\$--	--
(TR-1)	WALL TRIM	2" WALL TRIM TO MATCH WD-1 WOOD STAIN WALNUT	\$--	--
NOTE: MLP DESIGN, LLC. IS NOT RESPONSIBLE FOR WARRANTY OR FAILURE OF ANY PRODUCT THAT IS SPECIFIED IN THESE DRAWINGS. MANUFACTURER/VENDOR IS RESPONSIBLE FOR WARRANTY, ETC. ON ALL PRODUCTS.				



MLP Design, LLC.  
Interiors . Concept . Planning

Contact info.:  
C: (321) 356.6147  
E: mpoltar@mlpdesign.org  
W: www.mlpdesign.org

**PISCO PERUVIAN GASTROBAR**  
**9344 N Narcoossee Rd**  
**Orlando, FL 32827**

LICENSE NUMBER:  
MARIANNE POLTAR, NCIDQ  
#ID6568

DESCRIPTION	DATE
DID DRAWINGS REV.1	05.26.22
DID DRAWINGS REV.2	06.14.22
DID DRAWINGS REV.3	07.06.22

DRAWN: MP  
DATE: 07.06.22

SCHEDULES

**DID.9**